



Backlighting

# CHAINS

Make your brand shine—Chains deliver bold, uniform light for standout signage.



## Overview

- Available in assorted white color temperatures
- Illuminate any shape
- Low energy consumption high lumen output
- IP67 rated
- 24v Output to allow more chains per power supply
- Economical backlighting solution
- Easy to install

### CODE

### LUMENS

### COLOR

### DIMMING

CHNS

Low = 178 lm/ft  
Med = 268 lm/ft  
High = 352 lm/ft

30K = 3000 Kelvin  
50K = 5000 Kelvin  
65K = 6500 Kelvin

ND = Non-Dimmable  
010 = 0-10V Dimming

\*Consult factory for additional Kelvin Temps



# CHAINS

## Specifications


### Electrical

<b>Input Voltage</b>	24v
<b>Power Consumption</b>	1.2 W/ft
<b>Brightness</b>	178 lm/ft
<b>LED Bulbs per Foot</b>	4 (2 chain modules per foot)

### Physical

<b>Color Temperature</b>	3000K, 5000K, 6500K
<b>Environment</b>	Dry, Damp, and Wet locations
<b>IP Rating</b>	IP67
<b>Operating Temperature</b>	-22oF ~ 158oF

## Diagrams

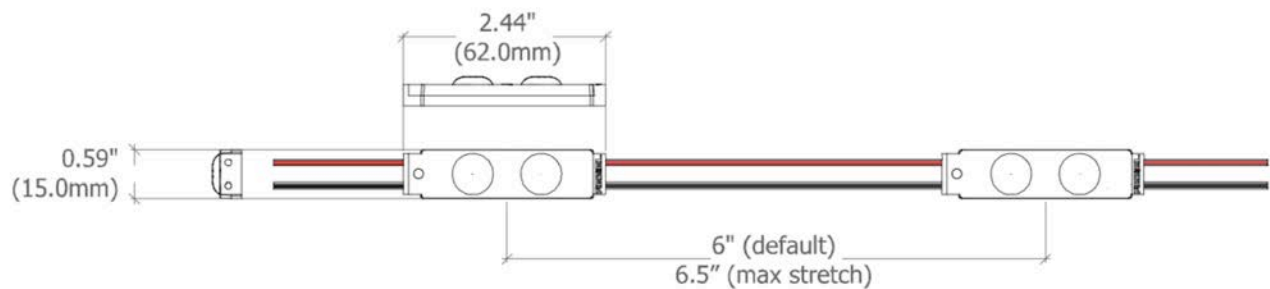

2- Bulb, Small Body, 2 Modules per foot