




Backlighting

# FRAMELIGHTS

Create dramatic, impactful,  
stunning design elements with  
FSL frame lights

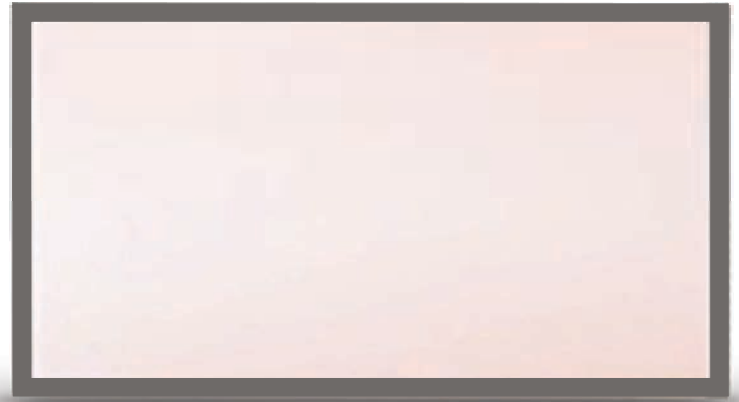

Classic Frame with Palette White Diffuser



Classic Frame with Palette White Diffuser



Classic Frame with Sky Image on Acrylic



Snap Frame with Custom Image on Film

## Overview

- LED light source and diffuser encased by extruded aluminum frame.
- 2 Frame Styles available
- Static White, Tunable and RGB Light sources at 12 Volts available
- Multiple diffuser options: Solid translucent acrylics and images on acrylics
- Interchangeable Image film diffusers available
- Sizes up to 4' x 8'

	CODE	FRAME STYLE	FRAME COLOR	COLOR	DIFFUSER	DIMMING/CONTROLS
FRM						
	CLS = Classic Frame SNP = Snap Frame	Fixed Snap Frame	WH = White SL = Silver	30K = 3000 Kelvin 35K = 3500 Kelvin 41K = 4100 Kelvin 53K = 5300 Kelvin TW = Tunable White RGB = Color Changing	WA = White Acrylic CIA = Custom Image on Acrylic CIF = Custom Image on Film* *Film diffuser for Snap Frame Only	ND = Non Dimmable 010 = 0-10 Dimming DMX = DMX (Signal Input by Others) DL010 = Dual 0-10 (for Tunable)



# FRAMELIGHTS

## Specifications

### Electrical


Input Voltage	12VDC
Power Consumption	4.0W/linear ft (Standard) 5.0W/linear ft (Tunable and RGB)
Wire Size	20 AWG 2 wire
Wiring	Each panel must have direct connection to power supply. Do not wire panels in series.
Connector	2.1/5.5mm barrel plug (Standard), bare wire (RGB) Standard 5' (1500mm), optional 10' (3000mm)
Certification	UL/cUL

### Physical

Color Temperature	3000K, 3500K, 4100K, 5300K, Tunable White (3000K - 6500K) and RGB
Environment	Dry Locations Only
Mounting	Slat wall mounted with screws and V-clips, hanging with eye screws
Minimum Size	3" (75mm) x 3" (75mm)
Maximum Size	36" (915mm) x 48" (1220mm)
Weight	2.2 lbs/sqft

## Line Drawings

### Classic Frame

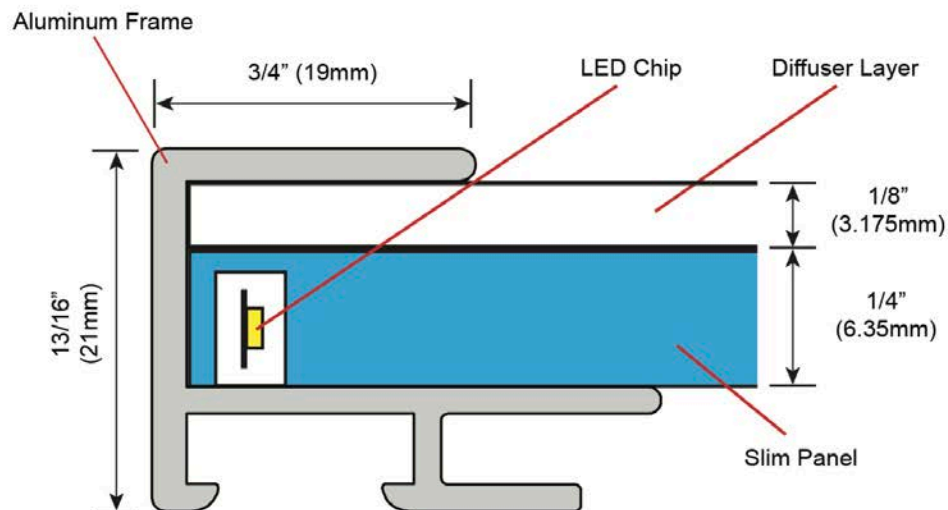

# FRAMELIGHTS

## Specifications

### Electrical

Input Voltage	12VDC
Power Consumption	4.0W/linear ft (Standard) 5.0W/linear ft (Tunable and RGB)
Wire Size	20 AWG 2 wire
Wiring	Each panel must have direct connection to power supply. Do not wire panels in series.
Connector	2.1/5.5mm barrel plug (Standard), bare wire (RGB) Standard 5' (1500mm), optional 10' (3000mm)
Certification	UL/cUL

### Physical

Color Temperature	3000K, 3500K, 4100K, 5300K, Tunable White (3000K - 6500K) and RGB
Environment	Dry Locations Only
Mounting	Slat wall mounted with screws and V-clips, hanging with eye screws
Minimum Size	3" (75mm) x 3" (75mm)
Maximum Size	36" (915mm) x 48" (1220mm)
Weight	2.2 lbs/sqft

## Line Drawings

### Snap Frame

